

# AUTOSCAN-T 3D System

## Unmanned Automatic 3D Inspection Solution



### Technical Parameter

Type		TrackScan-P42
Scan mode	Ultra-fast scanning	17 blue laser crosses
	Hyperfine mode B	7 blue parallel laser lines
	Deep hole scanning	1 extra blue laser line
Laser lines in total		42
Accuracy <sup>(1)</sup>		Up to 0.025 mm
Measurement rate		1,900,000 measurements/s
Scanning area		Up to 500 mm × 600 mm
Laser class		Class II (eye-safe)
Resolution		0.020 mm
Volumetric accuracy <sup>(2)</sup>	10.4 m <sup>3</sup>	0.064 mm
	18.0 m <sup>3</sup>	0.078 mm
Volumetric accuracy (With MSCAN-L15 photogrammetry system)		0.044 mm + 0.015 mm/m
Portable CMM T-Probe	Optional	Support
	Single point repeatability	0.030 mm
Stand-off distance		300 mm
Depth of field		400 mm
Output formats		.stl, .ply, .obj, .igs, .wrl, .xyz, .dae, .fbx, .ma, .asc or customized
Operating temperature range		-10°C ~ 40°C
Interface mode		USB 3.0
Patents		CN204329903U, CN104501740B, CN104165600B, CN204988183U, CN204854633U, CN204944431U, CN204902788U, CN105068384B, CN105049664B, CN204902784U, CN204963812U, CN204902785U, CN204902790U, CN106403845B, CN209197685U, CN209263911U, CN106500627B, CN106500628B, CN206132003U, CN211121096U, US10309770B2, KR102096806B1, EP3392831A4

(1) ISO 17025 accredited: Based on VDI/VDE 2634 Part 3 standard and JJF 1951 specification, probing error (size) (PS) performance is evaluated.  
 (2) ISO 17025 accredited: Based on VDI/VDE 2634 Part 3 standard and JJF 1951 specification, sphere spacing error (SD) performance is evaluated.

# SCANTECH™

## TRACKSCAN 3D System

### Intelligent 3D Tracking With Unrivaled-fast Measurement



**SCANTECH (HANGZHOU) CO., LTD**  
 Building 12, No.998, Wenyi West Road, Yuhang District, Hangzhou,  
 Zhejiang Province, China  
 Tel: 0086-571-85852597 Fax: 0086-571-85370381  
 E-mail : info@3d-scantech.com  
 Website : www.3d-scantech.com

SCANTECH™

Copyright ©

SCANTECH (HANGZHOU) CO., LTD






# TRACKSCAN

TrackScan-P42 3D system adopts intelligent optical tracking measurement technology and high-quality optical equipment. It carries out ultra-high precision dynamic 3D measurement without markers. This 3D system is widely applied to quality control, product development, reverse engineering, etc.

By freely switching multiple working modes, TrackScan-P42 caters to different scanning situations. 17 crossed blue laser lines enable ultra-fast scanning rate of 1,900,000 measurements/s and smooth experience. 7 parallel blue laser lines work for detail capturing. Single blue laser line aims to fast collecting 3D data of deep holes and dead angle positions.

The equipped wireless portable CMM T-Probe delivers flexible measurement, and precisely captures high-precision 3D data of gaps, hole positions, grooves and complex surface. By working with robot-arm, TrackScan-P42 can also realize intelligent online automated 3D inspection.

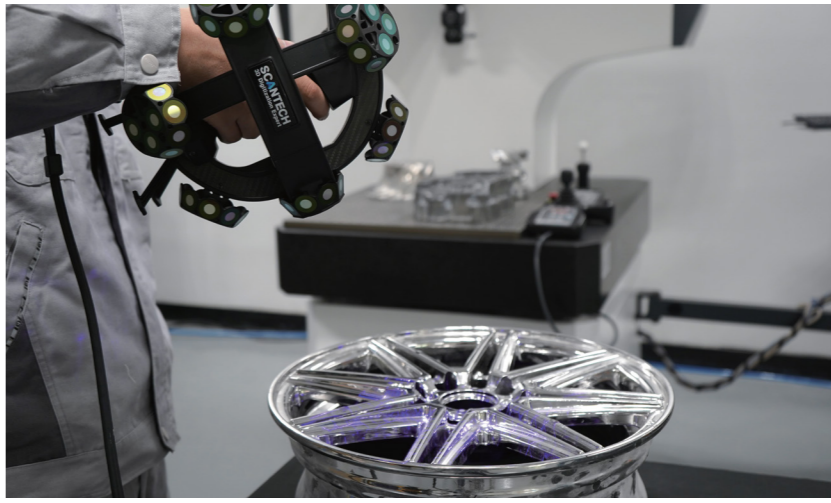

### Strong Anti-interference Capability

Easily capture 3D data for shiny and black surface; strong anti-interference capability of environment, vibrations and thermal variations.




### Accurate Composite Positioning

TrackScan-P42 supports modes of camera tracking and marker tracking. In the blind area of E-Track, the scanner can recognize the markers to keep working.



### Wireless Portable CMM

Portable CMM T-Probe is designed for getting precise 3D data of holes and hidden points, with high single point repeatability of 0.030 mm.



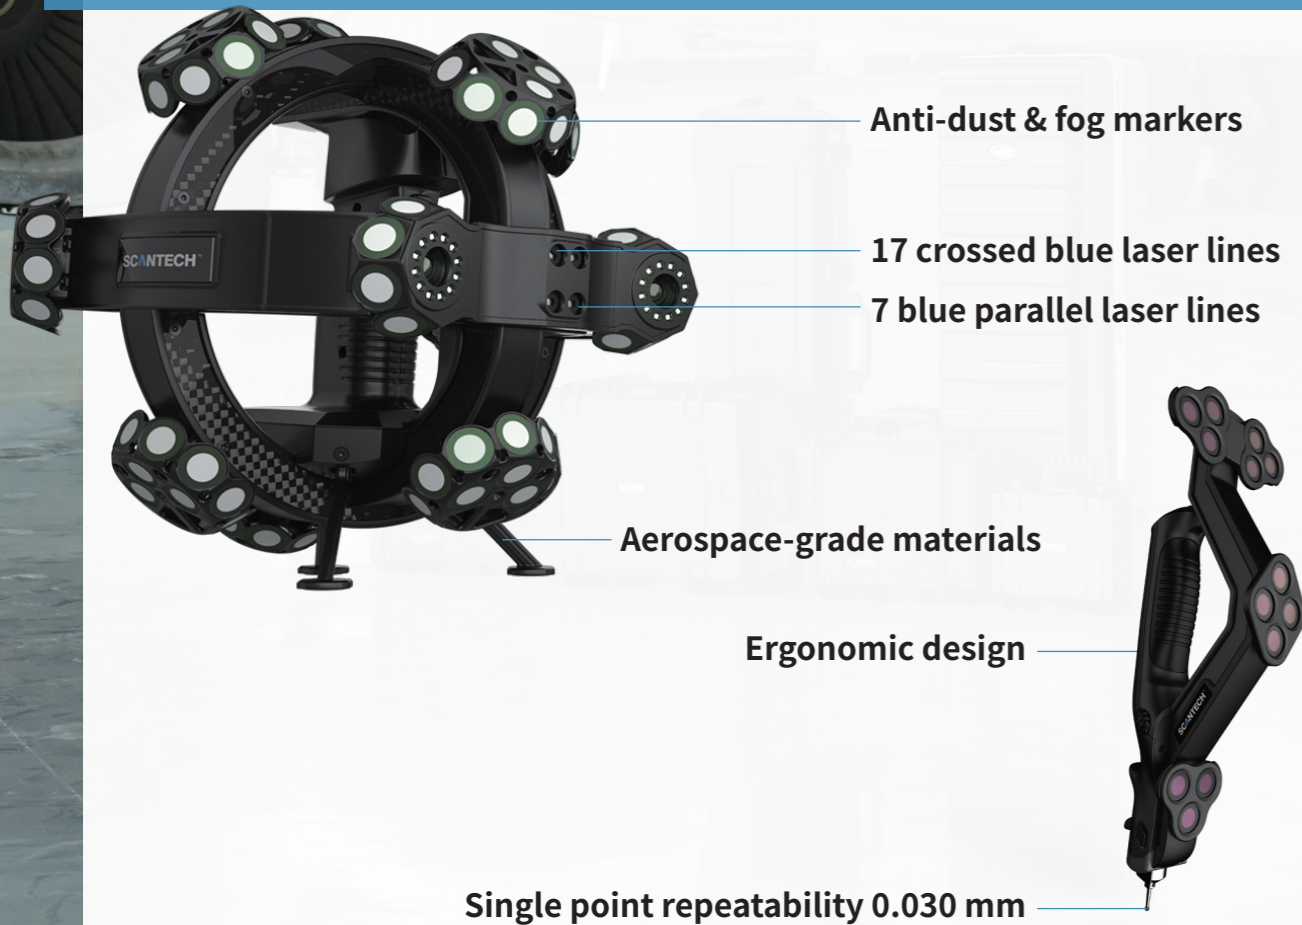


### Intelligent Tracking Without Markers

With intelligent optical tracking measurement, TrackScan-P42 3D system delivers instant scanning without markers, greatly improving work efficiency and decreasing cost.

### Unrivaled-fast & Detail-maker

17 crossed blue laser lines enable ultra-fast scanning rate of 1,900,000 measurements/s and smooth experience. 7 parallel blue laser lines work for detail capturing. Single blue laser line aims to fast obtain 3D data of deep holes and dead angle positions.

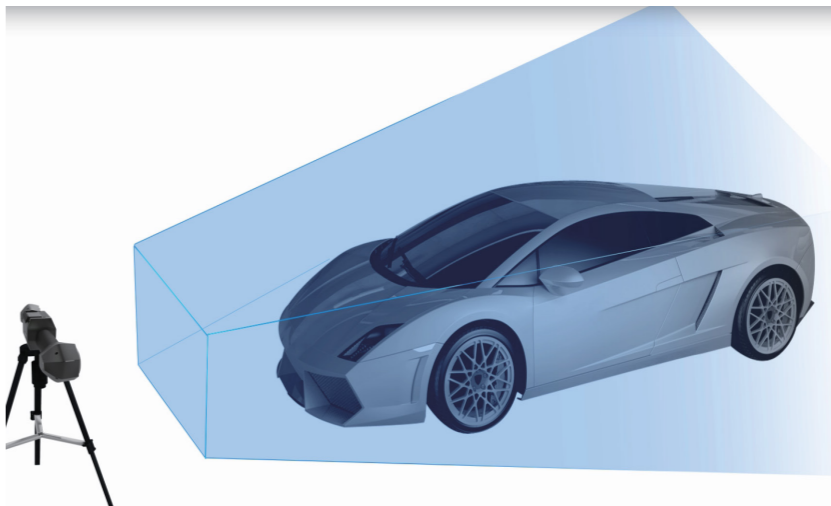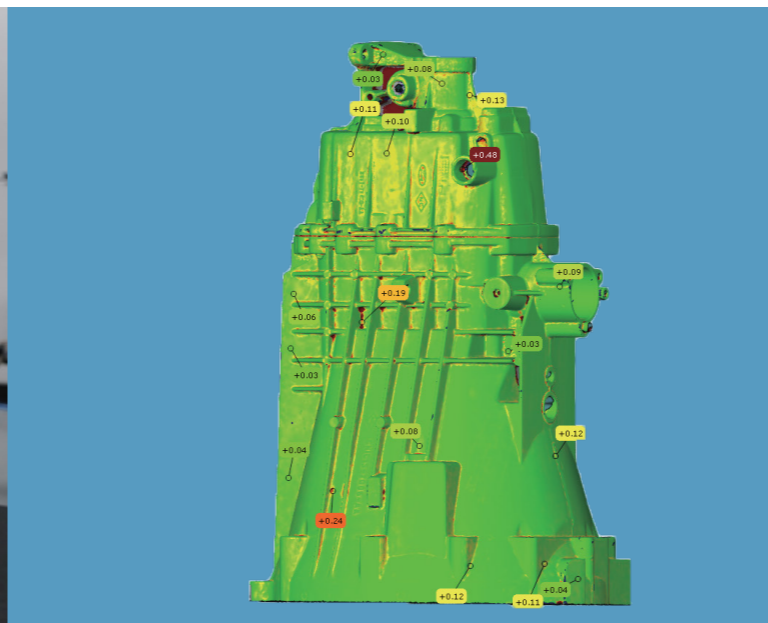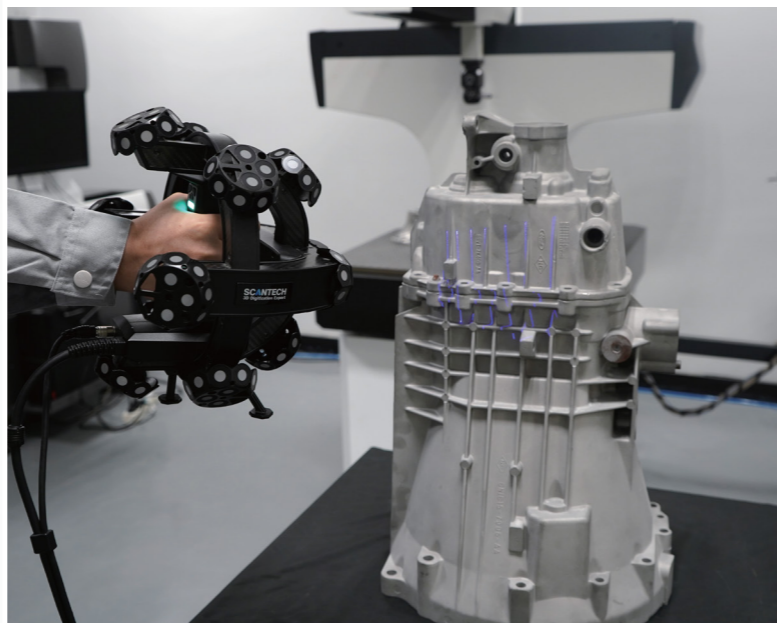

### Extendable Measuring Volume

Measuring range is dynamically extended by adjusting the positions of E-Track, meanwhile the accuracy still gets maintained.